
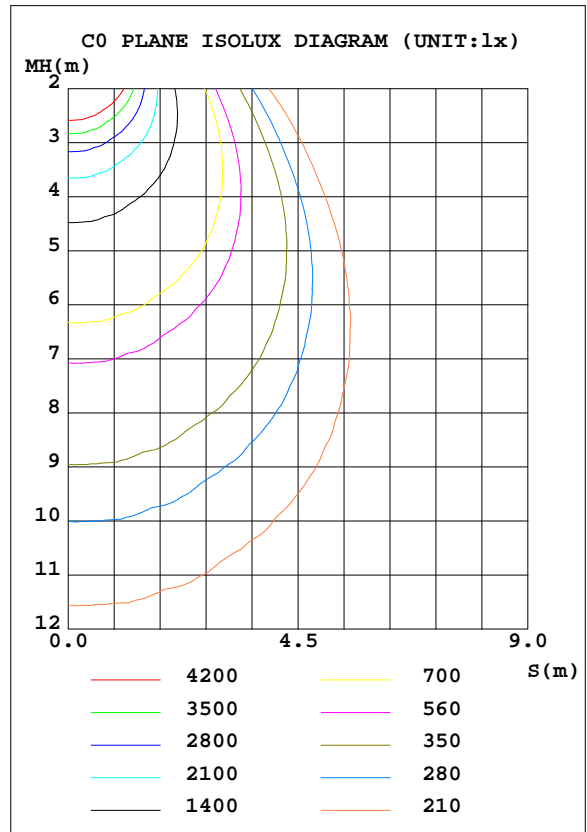


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.40 lm/W			
MODEL	ProLux 1000w Pro	Imax(cd)	52628	S/MH(C0/180)	1.22
NOMINAL POWER(W)	1000	LOR(%)	100.0	S/MH(C90/270)	2.07
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	135467	η UP, DN(C0-180)	0.0,51.3
NOMINAL FLUX(lm)	135467	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,48.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	240	η down(%)	100.0	CIBSE SHR MAX	1.55

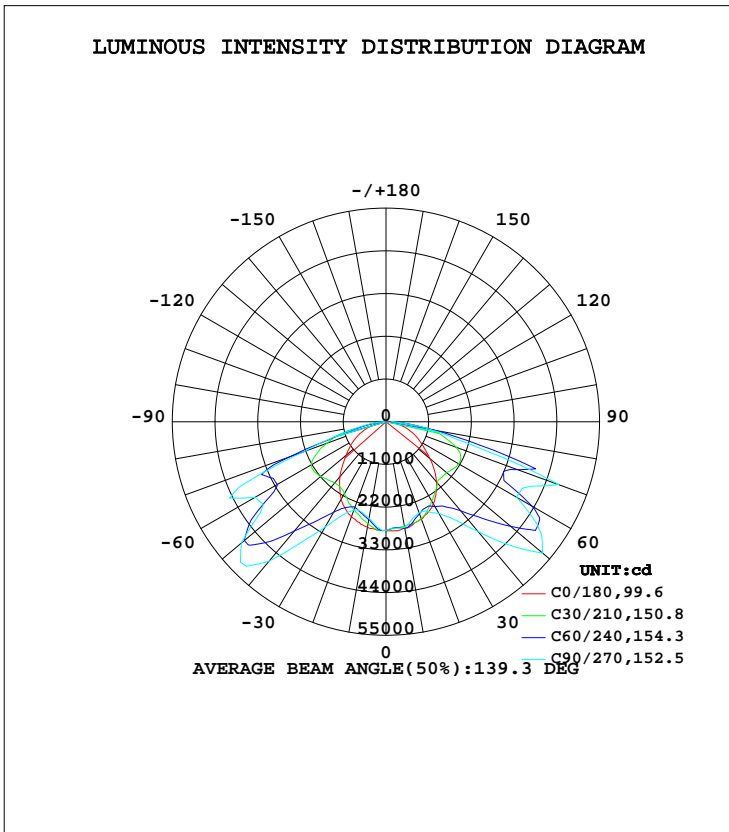

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:丁亮
 Test Date:2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	2782	2752	2765	2717	2755	2599	2523	2615	0- 10	2609	2609	1.93,1.93
20	2670	2578	2497	2528	2605	2350	2427	2364	10- 20	7320	9929	7.33,7.33
30	2433	2337	2719	2347	2306	2334	3124	2384	20- 30	11458	21387	15.8,15.8
40	2020	2473	3680	2544	1844	2794	4686	2929	30- 40	16647	38033	28.1,28.1
50	1475	3073	5263	3208	1340	3604	4863	3873	40- 50	24136	62169	45.9,45.9
60	1016	3716	3883	3436	949.1	2913	3893	3457	50- 60	27868	90037	66.5,66.5
70	640.7	2463	4732	2393	554.7	2311	2214	2719	60- 70	26030	116067	85.7,85.7
80	238.6	1366	1156	806.7	160.5	397.1	554.8	592.7	70- 80	15885	131952	97.4,97.4
90	8.624	189.3	163.6	114.7	10.60	51.97	38.56	71.19	80- 90	3515	135467	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:丁亮
 Test Date:2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

LUMINANCE LIMITATION CURVES

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

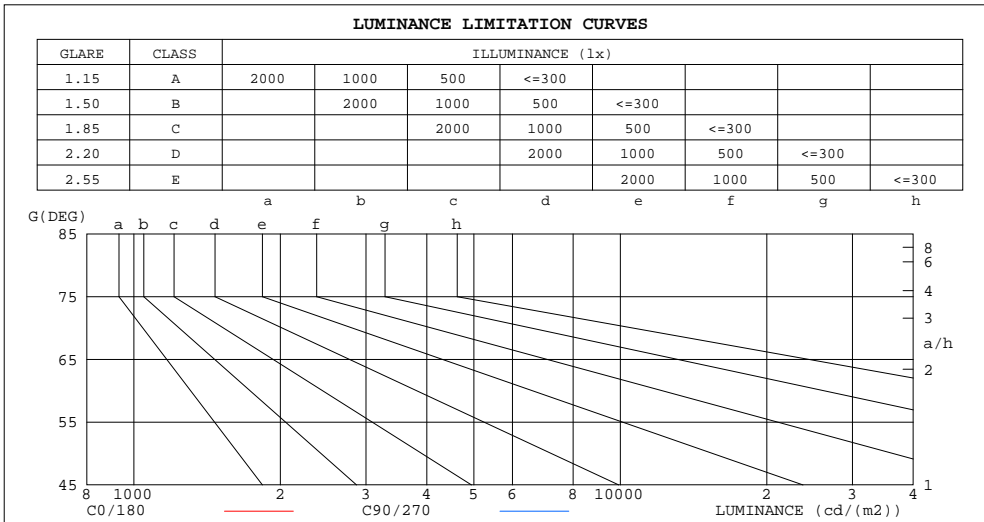

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	104162	561977
80	137402	665723
75	172456	863548
70	187323	1383401
65	196045	944608
60	203170	776536
55	212990	839397
50	229451	818745
45	249023	635223


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.01	.96	.91	.98	.94	.90	.94	.90	.87	.90	.87	.84	.86	.84	.81	.79
2.0	.85	.77	.70	.83	.76	.69	.79	.73	.68	.76	.71	.66	.73	.68	.64	.62
3.0	.73	.63	.55	.71	.62	.55	.68	.60	.54	.65	.58	.53	.62	.57	.52	.49
4.0	.63	.53	.45	.61	.52	.45	.59	.50	.44	.56	.49	.43	.54	.48	.43	.40
5.0	.55	.45	.37	.54	.44	.37	.51	.43	.36	.49	.42	.36	.47	.41	.36	.33
6.0	.49	.39	.31	.48	.38	.31	.46	.37	.31	.44	.36	.30	.42	.35	.30	.28
7.0	.43	.34	.27	.43	.33	.27	.41	.33	.26	.39	.32	.26	.38	.31	.26	.24
8.0	.39	.30	.23	.38	.29	.23	.37	.29	.23	.36	.28	.23	.34	.28	.23	.21
9.0	.36	.27	.21	.35	.26	.20	.34	.26	.20	.33	.25	.20	.32	.25	.20	.18
10.0	.33	.24	.18	.32	.24	.18	.31	.23	.18	.30	.23	.18	.29	.23	.18	.16

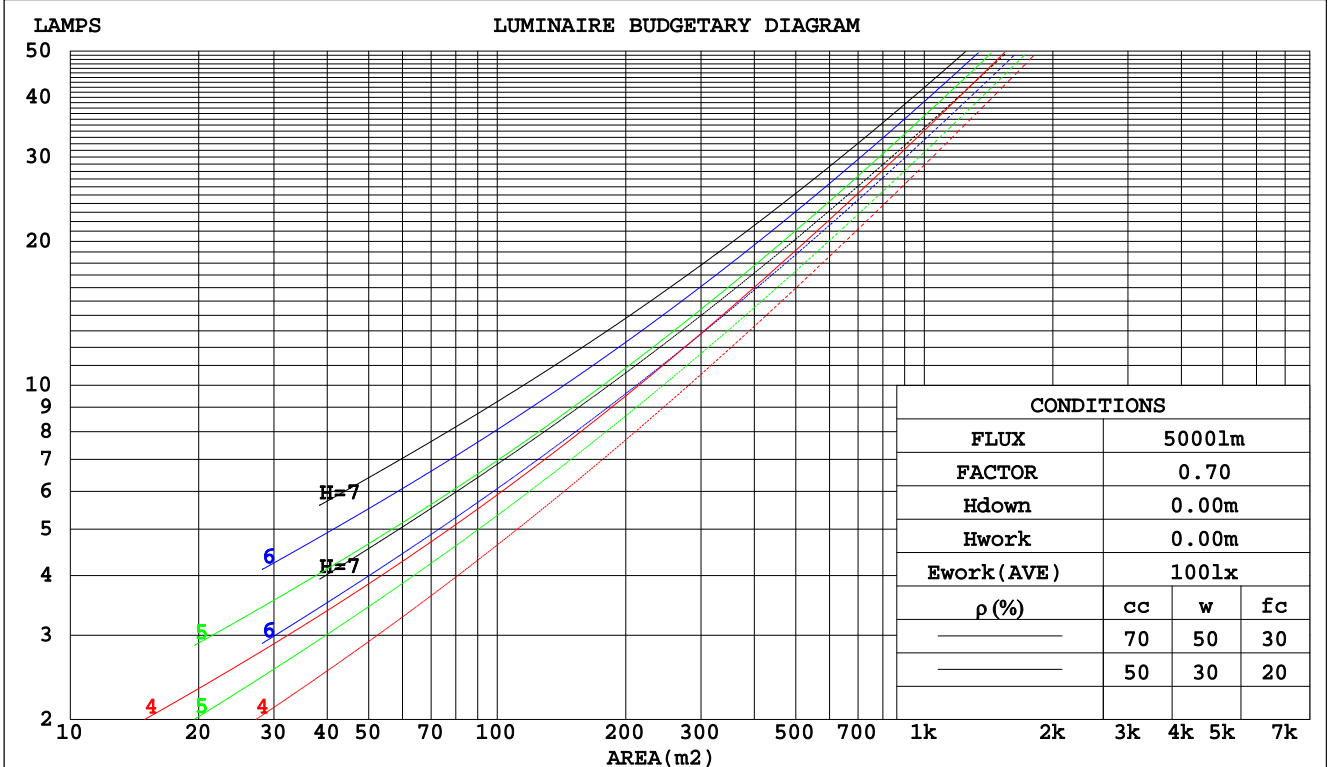

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

WEC AND CCEC

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.368	.209	.066	.361	.206	.065	.348	.199	.064	.335	.193	.062	.324	.188	.060	
2.0	.343	.188	.058	.337	.186	.057	.325	.181	.056	.313	.176	.055	.303	.171	.054	
3.0	.313	.167	.050	.308	.165	.050	.297	.161	.049	.287	.157	.048	.277	.154	.048	
4.0	.285	.148	.044	.280	.147	.043	.270	.143	.043	.261	.140	.042	.253	.138	.042	
5.0	.260	.133	.038	.256	.131	.038	.247	.129	.038	.239	.126	.038	.232	.124	.037	
6.0	.239	.120	.034	.235	.119	.034	.227	.116	.034	.220	.114	.034	.213	.112	.033	
7.0	.220	.109	.031	.217	.108	.031	.210	.106	.031	.203	.104	.030	.197	.102	.030	
8.0	.204	.100	.028	.201	.099	.028	.194	.097	.028	.189	.096	.028	.183	.094	.027	
9.0	.190	.092	.026	.187	.091	.026	.181	.090	.025	.176	.088	.025	.171	.087	.025	
10.0	.177	.085	.024	.174	.084	.024	.170	.083	.023	.165	.082	.023	.160	.081	.023	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.184	.156	.130	.158	.134	.112	.108	.092	.077	.062	.053	.045	.020	.017	.015	
2.0	.179	.132	.092	.153	.113	.079	.105	.078	.055	.061	.046	.032	.019	.015	.011	
3.0	.173	.115	.068	.148	.099	.059	.102	.069	.041	.059	.040	.024	.019	.013	.008	
4.0	.166	.102	.053	.142	.088	.046	.098	.061	.032	.057	.036	.019	.018	.012	.006	
5.0	.158	.092	.043	.136	.079	.037	.094	.055	.026	.054	.033	.016	.017	.011	.005	
6.0	.151	.084	.036	.130	.072	.031	.089	.051	.022	.052	.030	.013	.017	.010	.004	
7.0	.143	.077	.030	.123	.067	.026	.085	.047	.019	.050	.028	.011	.016	.009	.004	
8.0	.136	.071	.026	.117	.062	.023	.081	.043	.016	.047	.026	.010	.015	.008	.003	
9.0	.130	.066	.023	.112	.058	.020	.077	.040	.014	.045	.024	.009	.015	.008	.003	
10.0	.124	.062	.021	.106	.054	.018	.074	.038	.013	.043	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w P1

UGR(Unified Glare Rating) Table

NAME:		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.:		SUR.:					Shielding Angle:				
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		14.5	16.3	14.8	16.5	16.7	20.9	22.7	21.2	22.9	23.1
	3H	15.9	17.5	16.2	17.8	18.0	24.3	25.9	24.6	26.1	26.4
	4H	16.5	18.0	16.8	18.3	18.5	25.2	26.7	25.5	27.0	27.2
	6H	16.8	18.3	17.1	18.5	18.8	25.5	27.0	25.9	27.3	27.6
	8H	16.9	18.3	17.2	18.6	18.9	25.6	27.0	26.0	27.3	27.6
	12H	16.9	18.2	17.2	18.5	18.9	25.7	27.0	26.0	27.3	27.7
	4H 2H	17.7	19.3	18.1	19.6	19.8	21.4	23.0	21.8	23.3	23.5
	3H	19.3	20.7	19.7	21.0	21.3	25.2	26.5	25.5	26.8	27.1
	4H	20.1	21.3	20.4	21.6	22.0	26.2	27.5	26.6	27.8	28.1
	6H	20.5	21.6	20.9	21.9	22.3	26.7	27.8	27.1	28.2	28.5
	8H	20.6	21.6	21.0	22.0	22.4	26.9	27.9	27.3	28.3	28.7
	12H	20.6	21.5	21.0	21.9	22.3	27.0	27.9	27.4	28.3	28.7
	8H 4H	21.9	23.0	22.4	23.4	23.7	26.5	27.5	26.9	27.9	28.3
	6H	22.7	23.6	23.1	24.0	24.4	27.1	28.0	27.6	28.4	28.8
	8H	22.9	23.7	23.3	24.1	24.5	27.3	28.1	27.8	28.5	29.0
	12H	23.0	23.6	23.5	24.1	24.6	27.5	28.2	28.0	28.7	29.1
	12H 4H	22.1	23.0	22.5	23.4	23.8	26.5	27.5	26.9	27.8	28.3
	6H	22.9	23.7	23.4	24.1	24.6	27.1	27.9	27.6	28.3	28.8
	8H	23.2	23.9	23.7	24.3	24.8	27.4	28.1	27.9	28.5	29.0
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.8 / - 0.9				
2.0H		+ 0.6 / - 0.7					+ 0.5 / - 0.8				

CIE Pub.117, 135467 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 17.1)

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

UTILIZATION FACTORS TABLE

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	48	35	27	47	35	27	46	34	27	19
0.80	58	45	36	57	44	36	55	43	35	27
1.00	67	54	45	66	53	45	63	55	44	36
1.25	75	62	54	73	62	53	70	60	53	44
1.50	81	69	60	79	68	60	76	66	59	50
2.00	89	79	71	87	77	70	83	75	68	59
2.50	94	85	77	92	83	76	88	80	74	65
3.00	98	90	83	96	88	82	91	85	80	70
4.00	103	96	91	101	94	89	96	91	87	77
5.00	106	100	95	104	98	94	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

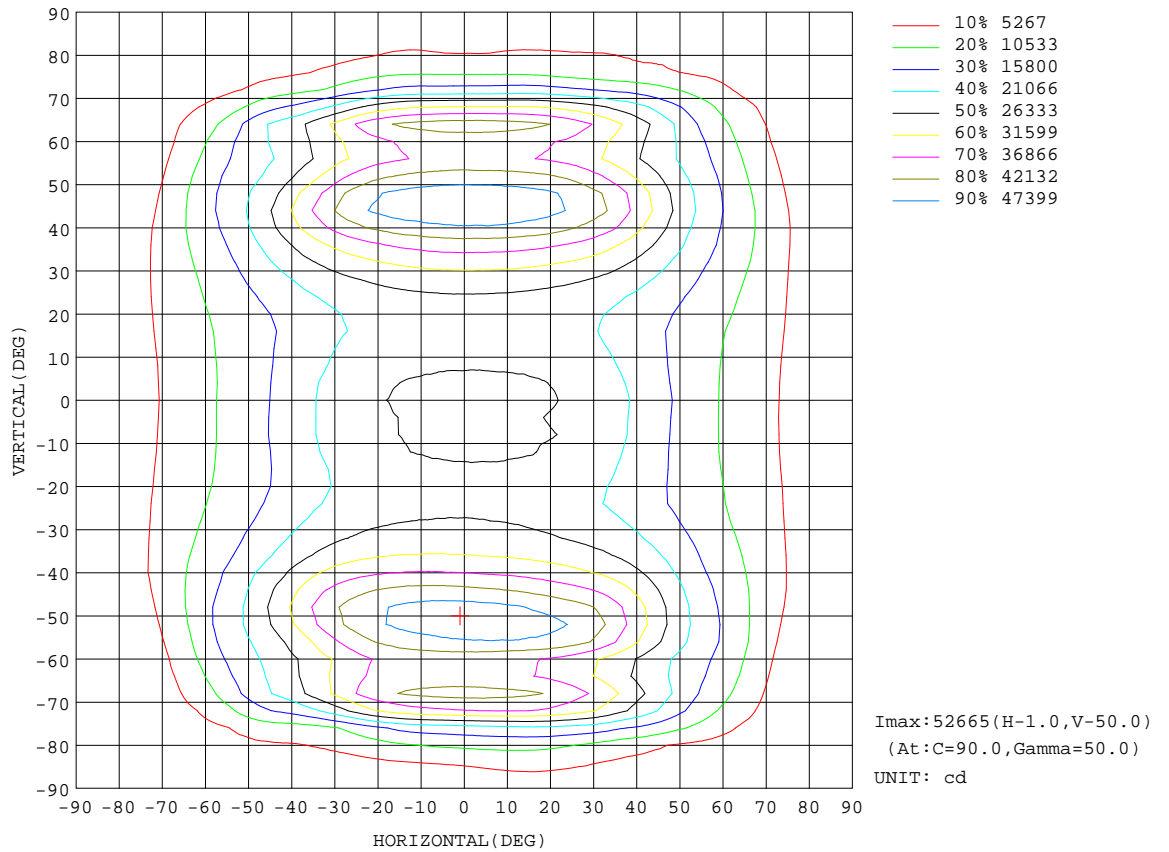


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w P1

AAI CURVES

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

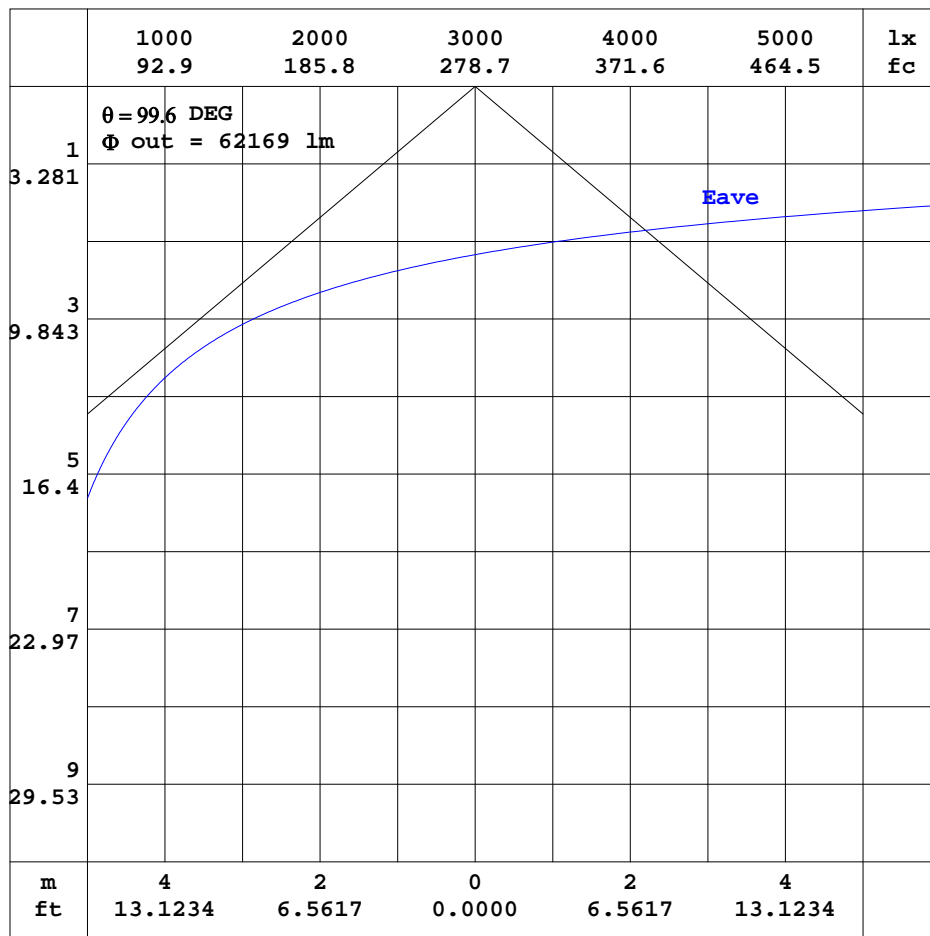


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w P1

ISOLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

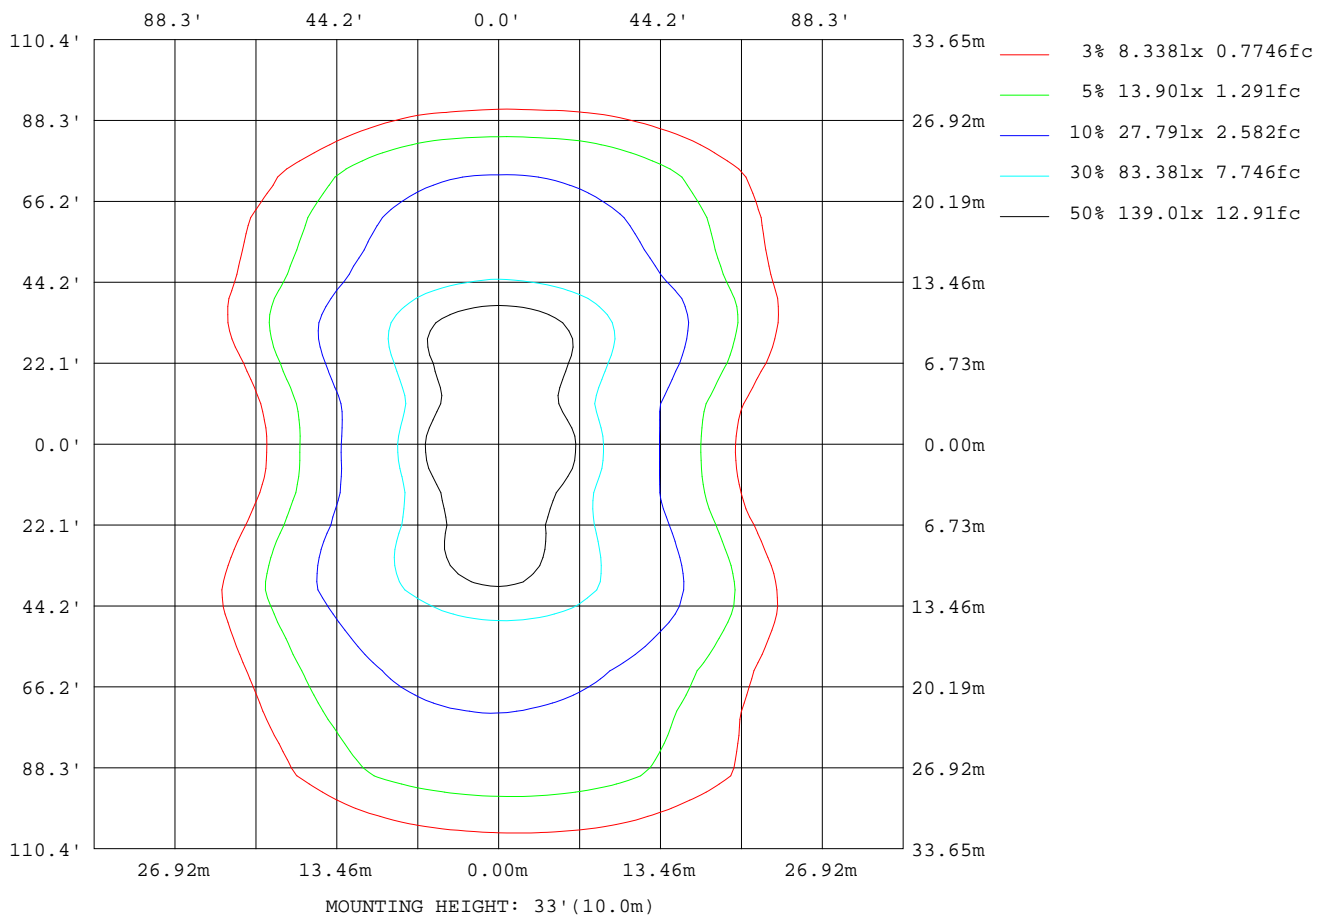

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w P1

LED Avg.L Report

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	187379
L_0~180(75)av	154521
L_0~180(85)av	84224
L_90~270(65)av	983024
L_90~270(75)av	650422
L_90~270(85)av	406509
L_45(65)av	645527
L_45(75)av	756233
L_45(85)av	351453

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w P1

Planar Illuminance Curve

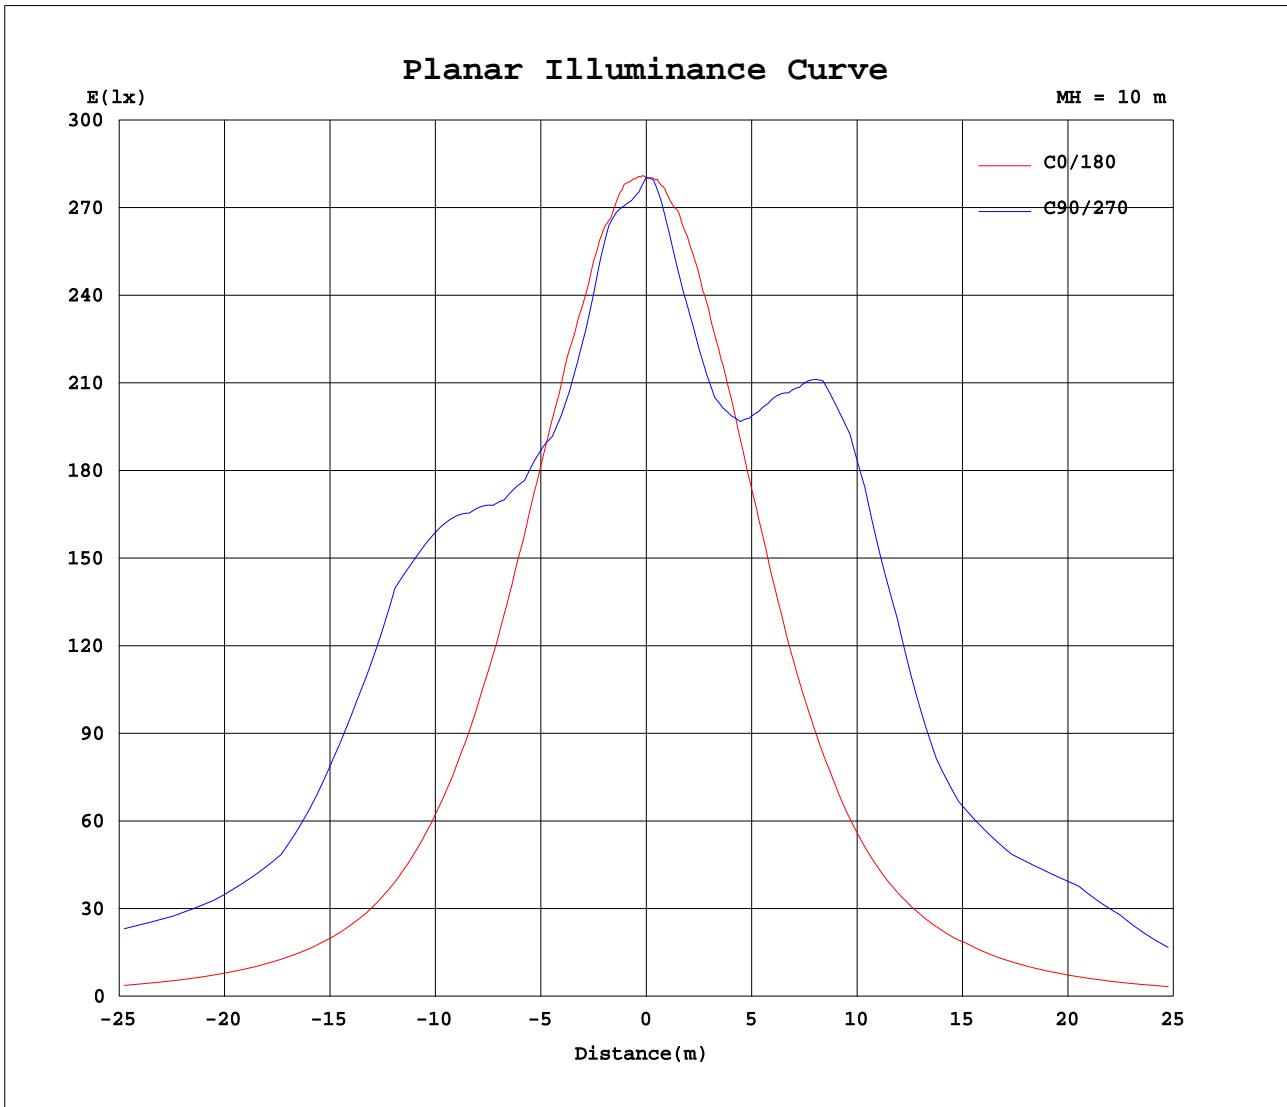

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 丁亮
 Test Date: 2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w P1

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: x10cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804
5	2818	2806	2794	2782	2770	2759	2752	2745	2739	2735	2732	2731	2733	2739	2744	2746	2747	2749	2748
10	2782	2765	2748	2737	2729	2726	2729	2737	2747	2752	2759	2773	2781	2777	2780	2778	2778	2774	2765
15	2729	2705	2689	2678	2684	2691	2707	2722	2734	2730	2715	2698	2677	2651	2630	2616	2610	2608	2601
20	2670	2640	2621	2627	2647	2658	2656	2650	2615	2578	2551	2531	2523	2513	2504	2497	2495	2498	2497
25	2572	2535	2533	2561	2586	2574	2520	2479	2447	2441	2433	2430	2438	2451	2466	2494	2531	2546	2554
30	2433	2422	2437	2470	2451	2401	2364	2348	2323	2337	2368	2444	2520	2583	2630	2663	2690	2711	2719
35	2245	2235	2260	2274	2241	2220	2210	2216	2253	2364	2471	2563	2675	2782	2866	2943	3007	3052	3078
40	2020	2019	2031	2020	2023	2032	2066	2170	2318	2473	2644	2817	2992	3182	3343	3475	3573	3641	3680
45	1761	1752	1781	1782	1812	1866	2029	2215	2460	2701	2981	3255	3524	3791	4018	4201	4343	4429	4492
50	1475	1477	1502	1554	1622	1801	2044	2348	2705	3073	3480	3856	4188	4503	4749	4968	5130	5206	5263
55	1222	1220	1274	1361	1504	1774	2115	2532	3014	3525	4044	4528	4744	4871	4935	4966	4901	4850	4815
60	1016	1029	1091	1198	1426	1758	2160	2660	3202	3716	4076	4322	4334	4199	4068	3964	3899	3881	3883
65	829	853	938	1088	1365	1707	2123	2548	2910	3124	3136	3140	3345	3523	3643	3751	3860	3948	3992
70	641	676	795	1005	1307	1626	1930	2112	2209	2463	2758	3148	3607	4021	4361	4579	4692	4755	4732
75	446	493	643	869	1132	1397	1569	1798	2129	2612	2931	2983	2928	2788	2646	2527	2387	2300	2235
80	239	315	451	560	757	987	1163	1294	1362	1366	1320	1286	1292	1292	1287	1265	1236	1203	1156
85	90.8	97.3	157	257	357	337	317	351	376	407	443	484	530	576	618	632	597	541	490
90	8.62	13.3	29.5	51.8	84.5	116	129	136	165	189	208	223	220	215	216	215	200	180	164

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:丁亮
 Test Date:2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

C(DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804
5	2746	2742	2739	2737	2737	2738	2736	2733	2731	2730	2729	2731	2733	2743	2756	2770	2783	2797	2796
10	2773	2780	2767	2753	2744	2741	2734	2725	2717	2709	2702	2697	2693	2701	2714	2727	2741	2755	2751
15	2598	2606	2611	2616	2625	2644	2655	2666	2680	2674	2670	2664	2649	2644	2645	2655	2668	2683	2676
20	2503	2498	2500	2494	2495	2501	2501	2507	2528	2562	2588	2595	2595	2574	2558	2558	2578	2605	2596
25	2548	2536	2515	2492	2476	2444	2427	2401	2396	2403	2414	2448	2477	2480	2460	2442	2447	2475	2462
30	2717	2706	2684	2658	2619	2557	2489	2400	2347	2302	2291	2278	2288	2316	2325	2301	2292	2306	2281
35	3073	3053	2997	2933	2861	2758	2636	2542	2424	2295	2197	2143	2113	2105	2115	2106	2090	2081	2069
40	3686	3663	3589	3479	3328	3132	2936	2744	2544	2374	2203	2048	1947	1893	1896	1884	1856	1844	1826
45	4509	4470	4368	4218	4009	3749	3462	3136	2798	2501	2238	2024	1834	1718	1652	1627	1609	1585	1577
50	5221	5153	5012	4839	4618	4378	4052	3655	3208	2756	2324	2021	1764	1564	1458	1396	1367	1340	1339
55	4784	4746	4741	4687	4617	4551	4397	3966	3530	3015	2495	2048	1720	1467	1289	1201	1160	1133	1148
60	3906	3946	3986	4004	3997	3894	3759	3609	3436	3039	2578	2128	1689	1392	1175	1036	971	949	974
65	4006	3981	3937	3832	3679	3421	3127	2935	2761	2571	2408	2050	1672	1326	1067	881	779	755	802
70	4667	4549	4394	4173	3834	3414	3051	2710	2393	2170	2011	1853	1594	1241	971	743	606	555	618
75	2203	2224	2220	2165	2139	2118	2150	2212	2152	1918	1649	1426	1193	960	786	587	437	354	439
80	1126	1091	1049	965	875	788	735	736	807	888	882	814	654	526	373	310	245	160	229
85	464	450	428	396	358	325	308	301	304	305	286	258	247	223	157	111	65.2	56.0	67.6
90	150	157	136	133	130	139	143	132	115	89.6	66.3	65.6	58.9	41.5	23.1	17.8	11.1	10.6	11.4

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:丁亮
 Test Date:2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--4

UNIT: x10cd

C(DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804	2804				
5	2723	2729	2735	2742	2752	2761	2768	2775	2784	2795	2808	2811	2813	2814	2816				
10	2537	2548	2561	2570	2576	2592	2615	2637	2664	2693	2721	2745	2763	2777	2780				
15	2422	2420	2426	2435	2452	2466	2493	2510	2527	2565	2622	2671	2715	2733	2738				
20	2414	2398	2382	2368	2362	2365	2364	2387	2420	2435	2478	2530	2588	2636	2666				
25	2591	2550	2513	2462	2414	2361	2315	2298	2296	2317	2343	2387	2447	2512	2562				
30	3021	2936	2834	2723	2599	2476	2384	2298	2220	2203	2213	2249	2299	2372	2427				
35	3618	3503	3350	3176	2974	2777	2589	2400	2262	2150	2089	2091	2133	2169	2223				
40	4467	4280	4056	3781	3497	3220	2929	2645	2380	2166	2004	1924	1925	1936	1985				
45	5101	4947	4753	4512	4192	3780	3354	2956	2583	2254	1986	1790	1725	1713	1729				
50	4896	4893	4894	4833	4642	4292	3873	3322	2814	2377	2020	1736	1539	1485	1467				
55	3927	4032	4168	4317	4364	4248	4019	3555	3025	2493	2047	1701	1432	1282	1232				
60	3825	3736	3617	3464	3358	3381	3457	3300	2977	2493	2051	1649	1332	1125	1045				
65	4347	4222	3959	3641	3300	2999	2699	2527	2477	2266	1925	1586	1258	1017	874				
70	2602	2788	2963	3118	3235	3056	2719	2329	2025	1816	1662	1437	1165	883	709				
75	1197	1204	1258	1371	1528	1734	1846	1848	1686	1454	1251	1090	944	720	530				
80	654	653	633	623	608	582	593	669	763	841	756	660	555	478	340				
85	253	264	272	288	301	310	318	320	295	271	237	211	226	178	122				
90	46.2	48.8	49.0	53.9	61.8	67.3	71.2	71.6	61.6	56.5	49.2	43.3	28.9	20.2	11.5				

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:丁亮
 Test Date:2021-03-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.708m [K=1.0000]
 Remarks: 铭钰客供1000W LED传统灯具 ProLux 1000w Pr